



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : H01B 11/18	A1	(11) International Publication Number: WO 98/13834 (43) International Publication Date: 2 April 1998 (02.04.98)
<p>(21) International Application Number: PCT/US97/16810</p> <p>(22) International Filing Date: 22 September 1997 (22.09.97)</p> <p>(30) Priority Data: 60/026,700 25 September 1996 (25.09.96) US</p> <p>(71) Applicant (for US only): AHERN, William, L. (legal representative of the deceased inventor) [US/US]; 199 Fort Avenue, Keyser, WV 26726 (US).</p> <p>(71) Applicant (for all designated States except US): COMM-SCOPE, INC. [US/US]; 1375 Lenoir-Rhyne Boulevard, Hickory, NC 28603-0339 (US).</p> <p>(72) Inventor: AHERN, Michael (deceased).</p> <p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): FOX, Steve, Allen [US/US]; 340 44th Avenue Drive N.W., Hickory, NC 28602 (US).</p> <p>(74) Agents: LINKER, Raymond, O., Jr. et al.; Alston & Bird LLP, Bell Seltzer Intellectual Property Law Group, P.O. Drawer 34009, Charlotte, NC 28234 (US).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: **COAXIAL CABLE AND METHOD OF MAKING SAME**

(57) Abstract

A flexible coaxial cable comprises a core including at least one inner conductor and a closed cell foam dielectric surrounding the inner conductor. The flexible coaxial cable also includes a tubular metallic sheath closely surrounding and preferably bonded to the core. The closed cell foam dielectric is a low density polyolefin foam and possesses improved electrical properties over conventional foam dielectrics. The coaxial cable has a velocity of

propagation of greater than about 90 percent of the speed of light but still maintains high flexibility and bending characteristics.

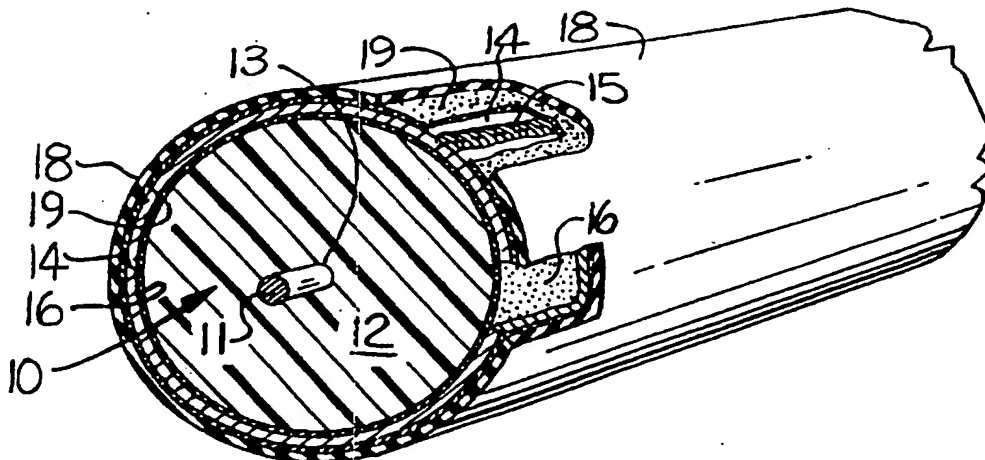

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

COAXIAL CABLE AND METHOD OF MAKING SAME

Field of the Invention

The present invention relates to a coaxial cable, and more particularly to an improved low-loss coaxial cable having enhanced bending and handling characteristics and improved attenuation properties for a given nominal size.

Background of the Invention

The coaxial cables commonly used today for transmission of RF signals, such as television signals, for example, include a core containing an inner conductor and a metallic sheath surrounding the core and serving as an outer conductor. A dielectric surrounds the inner conductor and electrically insulates it from the surrounding metallic sheath. In some types of coaxial cables, air is used as the dielectric material, and electrically insulating spacers are provided at spaced locations throughout the length of the cable for holding the inner conductor coaxially within the surrounding sheath. In other known coaxial cable constructions, an expanded foam dielectric surrounds the inner conductor and fills the spaces between the inner conductor and the surrounding metallic sheath.

One important attribute of coaxial cable is its ability to propagate a signal with as little attenuation as possible. One method of measuring signal propagation is expressed as a percentage of the speed of light, commonly known as velocity of propagation (V_p). Coaxial cables of the "air dielectric" type of construction have very good signal propagation characteristics, with V_p values typically 90% or higher. However, these coaxial cables unfortunately have relatively limited bending

characteristics and are susceptible to buckling, flattening or collapsing of the outer sheath, which adversely affect the electrical properties of the cable and render it unusable. Consequently, air dielectric type coaxial cables require very careful handling during installation to avoid such damage. Additionally, they are not recommended for use in installations requiring small radius bends or frequent reverse bends.

Coaxial cables of the "foam dielectric" type of construction, on the other hand, possess significantly better bending properties than air dielectric cables. They can be more easily installed without undue concern over buckling, flattening or collapsing of the outer sheath and they can be used in environments where air dielectric type cables are unsuitable. However, they are hampered by a somewhat lower velocity of propagation than air dielectric type cables. This reduction in V_p and increase in attenuation loss is attributable to the foam dielectric.

An early foam dielectric coaxial cable used a polystyrene foam produced with a pentane blowing agent, as mentioned in U.S. Pat. No. 4,104,481 to Wilkenloh et al. While the foam dielectric provided excellent signal propagation, with velocity of propagation (V_p) values of 90% and higher, the use of pentane as a blowing agent and the open cell nature of the resulting polystyrene foam were drawbacks which limited the widespread commercial use of this cable construction.

An alternative to the open cell polystyrene foam dielectrics has been to use a closed cell expanded polyolefin foam dielectric. U.S. Pat. No. 4,104,481 describes a coaxial cable with a polyolefin foam dielectric comprising polyethylene or polypropylene which is foamed using a chlorofluorocarbon blowing agent and a nucleating agent. The resulting foam

dielectric possesses increased bending properties without the negative affects associated with the polystyrene/pentane systems. U.S. Pat. No. 4,472,595 to Fox et al. discloses a foam dielectric coaxial cable
5 having enhanced handling and bending characteristics.

More recently, due to environmental concerns and governmental regulations, manufacturers of foams have discontinued the use of most chlorofluorocarbons and have turned to alternative blowing agents such as
10 nitrogen, sulfur hexafluoride and carbon dioxide. However, the need exists to improve the signal propagation properties of foam dielectrics produced with these alternative blowing agents.

Summary of the Invention

15 In accordance with the present invention, a foam dielectric coaxial cable is provided which has a velocity of propagation (V_p) of greater than about 90% the speed of light. This high propagation value is a very significant improvement over the propagation
20 values of the presently available foam dielectric coaxial cables and is comparable to the signal propagation properties of air dielectric type coaxial cables. However, the foam dielectric coaxial cable of the invention has flexibility and bending
25 characteristics which are vastly superior to air dielectric type coaxial cables. Thus, the coaxial cable of the present invention provides excellent signal propagation properties in combination with excellent flexibility and bending characteristics.

30 The coaxial cable of the present invention comprises a core including at least one inner conductor and a closed cell foam dielectric surrounding the inner conductor. A tubular metallic sheath closely surrounds and is preferably bonded to the core. The flexible
35 coaxial cable also may include a protective jacket closely surrounding the tubular metallic sheath. The

coaxial cable has a velocity of propagation (V_p) of 90 percent or greater.

5 The foam dielectric of the coaxial cable of the present invention has a low density, preferably no more than about 0.22 g/cc. The foam has a fine, uniform closed cell structure, preferably with a maximum cell diameter of 170 microns. The foam dielectric is preferably formed from a polyolefin, and most desirably from a blend of low density polyethylene and high density polyethylene. These characteristics provide a high core stiffness, which gives excellent flexibility and bending characteristics and also contributes to the excellent velocity of propagation of the coaxial cable.

10 These and other features and advantages of the present invention will become more readily apparent to those skilled in the art upon consideration of the following detailed description which describes both the preferred and alternative embodiments of the invention.

20 Brief Description of the Drawings

FIG. 1 is a perspective view showing a coaxial cable in accordance with the present invention in cross-section and with portions of the cable broken away for purposes of clarity of illustration.

25 FIG. 2 is a schematic illustration of an apparatus for producing the improved coaxial cable of the invention.

Detailed Description of the Invention

30 FIG. 1 illustrates a coaxial cable produced in accordance with the present invention. The coaxial cable comprises a core 10 which includes an inner conductor 11 of a suitable electrically conductive material such as copper, aluminum or copper-clad aluminum, and a surrounding continuous cylindrical expanded foam plastic dielectric material 12. In the

35

embodiment illustrated, only a single inner conductor 11 is shown, as this is the most common arrangement for coaxial cables of the type used for transmitting RF signals, such as television signals. However, it would be understood that the present invention is applicable also to cables having more than one inner conductor insulated from one another and forming a part of the core.

Preferably, the inner conductor 11 is bonded to the expanded foam plastic dielectric material 12 by a thin layer of adhesive 13 to form the core 10. Suitable adhesives for this purpose include ethylene acrylic acid (EAA) and ethylene methylacrylate (EMA) copolymers. Such adhesives are described in, for example, U.S. Pat. Nos. 2,970,129; 3,520,861; 3,681,515; and 3,795,540.

The dielectric 12 is a low loss dielectric formed of a suitable plastic such as a polyolefin. In order to reduce the mass of the dielectric per unit length and hence reduce the dielectric constant, the dielectric material should be of an expanded cellular foam composition. Furthermore, the foam should be of a closed cell construction to provide the desired high core stiffness and to prevent transmission of moisture along the cable. Preferably, the closed cell foam dielectric of the invention is an expanded polyolefin and a particularly preferred foam dielectric is an expanded blend of low density polyethylene and high density polyethylene. The preferred foam dielectric compositions of the invention are described in more detail below.

Closely surrounding the core is a continuous tubular metallic sheath 14. The sheath 14 is characterized by being both mechanically and electrically continuous. This allows the sheath 14 to effectively serve to mechanically and electrically seal the cable against outside influences as well as to seal

the cable against leakage of RF radiation. The tubular metallic sheath 14 may be formed of various electrically conductive metals such as copper or aluminum. The tubular metallic sheath 14 has a wall thickness selected so as to maintain a T/D ratio (ratio of wall thickness to outer diameter) of less than 2.5 percent. For the cable illustrated, the wall thickness is less than 0.030 inch.

In the preferred embodiment illustrated, the continuous sheath 14 is formed from a flat metal strip which is formed into a tubular configuration with the opposing side edges of the strip butted together, and with the butted edges continuously joined by a continuous longitudinal weld, indicated at 15. While production of the sheath 14 by longitudinal welding has been illustrated as preferred, persons skilled in the art will recognize that other methods for producing a mechanically and electrically continuous thin walled tubular metallic sheath could also be employed. For example, as is understood by those skilled in the art, methods which provide for a "seamless" longitudinal sheath may also be employed.

The inner surface of the tubular sheath 14 is continuously bonded throughout its length and throughout its circumferential extent to the outer surface of the foam dielectric 12 by a thin adhesive layer 16. Preferably, the adhesive layer 16 is an EAA or EMA copolymer as described above. The adhesive layer 16 should be made as thin as possible so as to avoid adversely affecting the electrical characteristics of the cable. Desirably, the layer of adhesive 16 should have a thickness of about 1 mil or less. The presently preferred method of obtaining such a thin deposit of adhesive and a suitable adhesive composition therefor are described in U.S. Pat. No. 4,484,023 to Gindrup.

The outer surface of the sheath 14, is optionally surrounded by a protective jacket 18. Suitable compositions for the outer protective jacket 18 include thermoplastic coating materials such as polyethylene, polyvinyl chloride, polyurethane and rubbers. The protective jacket 18 may be bonded to the outer surface of the sheath 14 by an adhesive layer 19 to thereby increase the bending properties of the coaxial cable. Preferably, the adhesive layer 19 is a thin layer of adhesive, such as an EAA or EMA copolymer as described above.

FIG. 2 illustrates a suitable arrangement of apparatus for producing the cable shown in FIG. 1. As illustrated, the inner conductor 11 is directed from a suitable supply source, such as a reel 31, and an adhesive layer 13 is applied to the surface of the inner conductor. The coated inner conductor 11 is then directed through an extruder apparatus 32. The extruder apparatus 32 continuously extrudes the foamable polymer composition concentrically around the inner conductor 11. Upon leaving the extruder, the plastic material foams and expands to form a continuous cylindrical wall of the foam dielectric 12 surrounding the inner conductor 11.

In an alternative embodiment of the invention, the foam dielectric 12 may have a gradient density wherein the density of the foam dielectric increases radially from an inner surface of the foam dielectric to an outer surface of the foam dielectric. The gradient density may be the result of altering the foamable polymer composition or the conditions exiting the extruder apparatus 32. Typically, however, the gradient density is provided by extruding a first foamable polymer composition and a second polymer composition in succession to form the foam dielectric 12. The first and second polymer compositions may be coextruded or extruded separately to form an inner foam

dielectric layer and an outer dielectric layer. Once foamed and expanded, the outer dielectric possesses a greater density than the inner foam dielectric layer. The outer dielectric layer may be a foamed dielectric or an unfoamed dielectric skin and may be formed from the same material as the inner foamed dielectric layer. The increased density at the outer surface of the foam dielectric 12 results in an increase in the core stiffness thus increasing the bending properties of the coaxial cable.

The outer surface of the core 10 is coated with a layer of adhesive 16. A copolymer adhesive composition is applied to the surface of the foam dielectric 12 by suitable applying means to form the adhesive layer 16. For example, the adhesive composition may be coextruded onto the foamable polymer composition or the second polymer composition in the extruder apparatus 32 or extruded onto the foam dielectric 12 in a separate extruder apparatus. Alternatively, the inner conductor 11 and surrounding dielectric 12 may be directed through an adhesive applying station 34 where a thin layer of an adhesive composition such as EAA or EMA is applied by suitable means, such as spraying or immersion. After leaving the adhesive applying station 34, excess adhesive may be removed by suitable means and the adhesive coated core 10 is directed through an adhesive drying station 36, such as a heated tunnel or chamber. Upon leaving the drying station 36, the core is directed through a cooling station 37, such as a water trough.

Once the adhesive layer 16 has been applied to the core 10, a narrow strip of metal S is directed from a suitable supply source such as reel 38 and is formed into a tubular configuration surrounding the core. The strip S then advances through a welding apparatus 39, and the opposing side edges of the strip S are positioned into butting relation and joined

together by a continuous longitudinal weld. The core and surrounding sheath are then passed through a rolling or stationary reduction die 40 where the tubular sheath 14 is reduced in diameter and brought into close relationship with the core 10. The thus produced assembly may then pass through a coating extruder apparatus 42 where a polymer composition is extruded around the metal sheath 14 to form a protective jacket 18 surrounding the sheath. Additionally, prior to application of the polymer composition forming the jacket 18, a thin layer of adhesive 19 may be applied to the surface of the sheath 14 by suitable means such as coextrusion in the coating extruder apparatus 42. The coating extruder apparatus 42 also serves to activate the adhesive 16 and to thereby form a bond between the sheath 14 and the outer surface of the dielectric 12. The thus produced cable may then be collected on suitable containers, such as reels 44, suitable for storage and shipment. Typically, the diameter of the cable is greater than about 0.25 inch.

The coaxial cables of the present invention have enhanced bending characteristics over conventional coaxial cables. One feature which enhances the bending characteristics of the coaxial cable of the invention is that the sheath 14 is adhesively bonded to the foam dielectric 12. In this relationship, the foam dielectric 12 supports the sheath in bending to prevent damage to the coaxial cable. In addition, the foam dielectric 12 as described above may possess a gradient density to support the sheath in bending. Therefore, increased core stiffness in relation to sheath stiffness is beneficial to the bending characteristics of the coaxial cable. Specifically, the welded sheath coaxial cables of the invention have a core to sheath stiffness ratio of at least 5, and preferably of at least 10. In addition, the minimum bend radius in the

welded sheath coaxial cables of the invention is significantly less than 10 cable diameters, more on the order of about 7 cable diameters or lower. The reduction of the tubular sheath wall thickness is such that the ratio of the wall thickness to its outer diameter (T/D ratio) is no greater than about 2.5 percent for cables having welded sheaths. The reduced wall thickness of the sheath contributes to the bending properties of the coaxial cable and advantageously reduces the attenuation in the coaxial cable. The combination of these features and the properties of the sheath 14 described above results in an outer sheath with significant bending characteristics.

As stated above, although coaxial cables having welded sheaths generally possess better mechanical properties than seamless sheaths, the present invention is also directed to seamless sheaths and improving the electrical and mechanical properties thereof. In these sheaths, the core to sheath stiffness ratio is at least about 2, and preferably at least about 5. In addition, the minimum bend radius in the seamless sheath coaxial cables of the invention is significantly less than 15 cable diameters, more on the order of about 10 cable diameters or lower. The reduction of the tubular sheath wall thickness is such that the ratio of the wall thickness to its outer diameter (T/D ratio) is no greater than about 5.0 percent for cables having seamless sheath constructions.

Furthermore, in addition to enhanced bending characteristics, the coaxial cable of the present invention possesses a velocity of propagation (V_p) greater than about 90 percent of the speed of light, and even greater than about 91 percent of the speed of light. The high values of V_p can be attributed in great part to the expanded closed cell foam dielectric of the present invention.

Typically, the closed cell foam dielectric originates from pellets of a polymer, such as a polyolefin, added to the extruder apparatus 32. Exemplary polyolefins include polyethylene, polypropylene, and combinations or copolymers thereof. Preferably, polyethylene pellets are used to form the foam dielectric 12 of the invention, and most desirably, the polyethylene comprises high density polyethylene (HDPE) or a combination of HDPE and low density polyethylene (LDPE).

It is conventional to incorporate with the polymer pellets, small amounts of a nucleating agent which will serve to provide nucleation sites for the gas bubbles during the foaming process. For example, U.S. Pat. No. 4,104,481 to Wilkenloh et al. describes the use of azobisformamides, such as azodicarbonamides, as nucleating agents in producing a foam dielectric for a coaxial cable. Since the nucleating agent is used in very small concentrations, e.g. as low as 0.01 percent by weight, masterbatch pellets containing a blend of the polymer and a relatively high concentration of the nucleating agent may be blended with unmodified polymer pellets to obtain the desired overall concentration of nucleating agent uniformly dispersed with the polymer. The nucleating agent-containing masterbatch pellets have traditionally been produced by compounding the nucleating agent with the polymer and forming pellets therefrom.

Nucleating agents may be characterized either as exothermic nucleating agents or endothermic nucleating agents. Exemplary exothermic nucleating agents include azobisformamides such as azodicarbonamides, commercially available from Uniroyal Chemical Co. under the Celogen trademark. Exemplary endothermic nucleating agents include sodium bicarbonate/citric acid agents, sodium carbonate/citric acid agents, sodium bicarbonate or sodium carbonate in

combination with other weak organic acids, and the like. The preferred nucleating agent for the present invention is a combination of exothermic and endothermic nucleating agents. Specifically, it has
5 been discovered that a polyolefin polymer such as polyethylene, when expanded with a combination of an exothermic nucleating agent and an endothermic nucleating agent, provides a closed cell foam dielectric with lower density than conventional foam
10 dielectrics using polyethylene blended only with exothermic nucleating agents. Preferably, the nucleating agent is a blend of an azobisformamide exothermic agent such as an azodicarbonamide and a sodium carbonate/citric acid endothermic nucleating
15 agent.

As stated above, nucleating agents typically have been compounded with the polymer to form pellets containing the nucleating agents. This involves thoroughly mixing the nucleating agents with the
20 polymer in an extruder while heating to melt the polymer. The mixture is then extruded and chopped into pellets for use. In the present invention, it is especially preferred to use pellets having nucleating agents which have been subjected to little or no
25 heating, i.e., pellets which have no thermal history. One method of providing nucleating agents without thermal history is to use a binder such as a thermoplastic resin. Typically, virgin pellets, beads, micropellets, powders, or granules of resin material
30 are coated with a thermoplastic resin binder and then coated with the nucleating agent for use in the invention. Exemplary thermoplastic binders include polyethylene, ethylene vinyl acetate (EVA) copolymers, polystyrene, polyvinyl chloride, polyethylene
35 terephthalate, nylon, fluoropolymers, and the like. The process of coating the resin with the thermoplastic binder and the nucleating agent occurs at temperatures

below 200°F so the properties of the nucleating agent are not affected. In the present invention, polyolefin pellets may be coated with a thermoplastic binder and an endothermic/exothermic nucleating agent blend.

5 Pellets of this type are available, for example, from NiTech Inc. of Hickory, North Carolina.

The nucleating agent-coated pellets used in the invention generally include between about 80 to less than 100 percent by weight of the polyolefin, greater than 0 to about 20 percent by weight of the exothermic nucleating agent, and greater than 0 to about 20 percent by weight of the endothermic nucleating agent. Preferably, the pellets include between about 85 and 95 percent by weight of the polyolefin, between about 1 and 10 percent by weight of the exothermic nucleating agent, and between about 1 and 10 percent by weight of the endothermic nucleating agent. An exemplary useful pellet formulation for the foam dielectric of the invention includes 90 percent by weight HDPE, 7.5 percent by weight of the azobisformamide exothermic nucleating agent, and 2.5 percent by weight of the sodium bicarbonate/citric acid endothermic nucleating agent.

The nucleating agent-coated pellets are mixed with unmodified polyolefin pellets to provide the desired concentration of nucleating agent uniformly in the polymer raw material which is fed to the extruder apparatus 32. Preferably, between about 0.1 and 10 percent by weight of the pellets are HDPE pellets containing exothermic and endothermic nucleating agents and between about 99.9 and 90 percent by weight of the pellets are unmodified LDPE and HDPE pellets.

In the extruder apparatus 32 the polymer pellets are heated to a molten state, where they are further combined with a blowing agent such as nitrogen or carbon dioxide. This composition is extruded from the crosshead die of the extruder surrounding the

center conductor 11, whereupon it expands and foams to produce the closed cell foam dielectric 12.

From the foregoing, it will be appreciated that a closed cell foam dielectric in accordance with the present invention is distinctly different from dielectrics produced with the use of conventional nucleating agents. For example, in addition to a lower density, the foam will be characterized by having residual amounts of both exothermic and endothermic nucleating agents. In addition, residual amounts of the thermoplastic resin binder (or degradation products therein) may be detectable.

The foam dielectric of the invention has a lower density, and provides greater core stiffness for a given density than foam dielectrics produced with previously known technology using azodicarbonamide nucleating agents. The density of the foam dielectric is less than about 0.22 g/cc, preferably less than about 0.19 g/cc, and more preferably less than about 0.17 g/cc. As is well known in the art, lower density in the foam dielectric 12 generally results in an increase in the velocity of propagation of the coaxial cable. In addition, a decrease in the density of the closed cells generally results in an increase in the cell size. The maximum size of the cells in the foam dielectric is typically less than about 170 microns and the mean cell size is between about 90 and 130 microns. Specifically, the maximum cell size at a density of 0.22 g/cc is about 125 microns, at a density of 0.19 g/cc is about 150 microns, and at a density of 0.17 g/cc is about 170 microns. Although not wishing to be bound by theory, it appears that the cell size and density in the present invention is attributable to the lack of heat history in the polymer pellets thus providing a nucleating agent with a higher fraction of fine particles and therefore a smaller mean particle size.

It is understood that upon reading the above description of the present invention, one skilled in the art could make changes and variations therefrom. These changes and variations are included in the spirit
5 and scope of the following appended claims.

THAT WHICH IS CLAIMED:

1. A flexible coaxial cable comprising a core including at least one inner conductor and a closed cell foam dielectric surrounding the inner conductor, and a tubular metallic sheath closely surrounding said core, said coaxial cable having a velocity of propagation (V_p) of 90 percent the speed of light or greater.
2. The coaxial cable according to Claim 1 further comprising a protective jacket surrounding said tubular metallic sheath.
3. The coaxial cable according to Claim 2 wherein said protective jacket is adhesively bonded to said tubular metallic sheath.
4. The coaxial cable according to Claim 3 wherein said tubular metallic sheath comprises an electrically and mechanically continuous smooth-walled metal tube bonded to said core.
5. The coaxial cable according to Claim 4 wherein said at least one inner conductor is bonded to said foam dielectric to form said core.
6. The coaxial cable according to Claim 1 wherein said at least one inner conductor is bonded to said foam dielectric to form said core.
7. The coaxial cable according to Claim 1 wherein said closed cell foam dielectric has a gradient density, said gradient density increasing radially from an inner surface of said dielectric to an outer surface of said dielectric, and wherein the outer surface of said dielectric is bonded to said tubular metallic sheath.

8. The coaxial cable according to Claim 7 wherein said foam dielectric comprises an inner foam dielectric layer and an outer dielectric layer, said outer dielectric layer having a density greater than
5 the density of said inner foam dielectric layer.

9. The coaxial cable according to Claim 8 wherein said outer dielectric layer is an unfoamed dielectric skin.

10. The coaxial cable according to Claim 1 wherein said closed cell foam dielectric comprises a foamed polyolefin having a density of no more than 0.22 g/cc.
10

11. The coaxial cable according to Claim 1 wherein said closed cell foam dielectric comprises a foamed polyolefin having a density of no more than 0.19 g/cc.
15

12. The coaxial cable according to Claim 1 wherein said closed cell foam dielectric comprises a foamed polyolefin having a density of no more than 0.17 g/cc.
20

13. The coaxial cable according to Claim 10 wherein said closed cell foam dielectric is a blend of low density polyethylene and high density polyethylene.

14. The coaxial cable according to Claim 10 wherein the cells of said closed cell foam dielectric have a maximum cell diameter of 170 microns.
25

15. The coaxial cable according to Claim 10 wherein the cells of said closed cell foam dielectric have a mean cell diameter of between about 90 and 130 microns.
30

16. The coaxial cable according to Claim 10 wherein the cable has a minimum bend radius of less than 10 cable diameters.

5 17. A coaxial cable comprising a core including at least one inner conductor and a polyolefin closed cell foam dielectric surrounding the inner conductor, and a tubular metallic sheath closely surrounding said core, said closed cell foam dielectric having a density of no more than 0.22 grams per cubic
10 centimeter and containing residual amounts of an endothermic nucleating agent.

18. The coaxial cable according to Claim 17 wherein said closed cell foam dielectric also includes residual amounts of an exothermic nucleating agent.

15 19. The coaxial cable according to Claim 17 wherein said closed cell foam dielectric also includes residual amounts of a thermoplastic binder.

20 20. The coaxial cable according to Claim 17 wherein said closed cell foam dielectric is a blend of low density polyethylene and high density polyethylene.

21. The coaxial cable according to Claim 17 wherein said cable has a velocity of propagation (V_p) of 90 percent of the speed of light or greater.

25 22. The coaxial cable according to Claim 17 wherein the cells of said closed cell foam dielectric have a maximum cell diameter of 170 microns.

30 23. The coaxial cable according to Claim 17 wherein the cells of said closed cell foam dielectric have a mean cell diameter of between about 90 and 130 microns.

24. The coaxial cable according to Claim 17 wherein said closed cell foam dielectric has a gradient density, said gradient density increasing radially from an inner surface of said dielectric to an outer surface of said dielectric.

25. The coaxial cable according to Claim 24 wherein said foam dielectric comprises an inner foam dielectric layer and an outer dielectric layer, said outer dielectric layer having a density greater than the density of said inner foam dielectric layer.

26. The coaxial cable according to Claim 24 wherein said outer dielectric layer is an unfoamed dielectric skin.

27. A coaxial cable comprising a core including at least one inner conductor and a closed cell polyethylene foam dielectric surrounding the inner conductor and bonded thereto, said closed cell foam dielectric having a density of no more than 0.22 grams per cubic centimeter, an electrically and mechanically continuous smooth-walled tubular metallic sheath closely surrounding said core and being adhesively bonded thereto, and a protective jacket closely surrounding said tubular metallic sheath, said coaxial cable having a velocity of propagation (V_p) of 90 percent the speed of light or greater.

28. A method of making a coaxial cable comprising the steps of:

advancing a conductor into and through an extruder and extruding thereon a foamable polymer composition comprising a polyolefin, an endothermic nucleating agent and a blowing agent;

causing the foamable polymer composition to foam and expand to form a cable core comprised of an

expanded foam dielectric surrounding the advancing conductor; and

forming an electrically and mechanically continuous metallic sheath around the cable core to produce a coaxial cable.

29. The method according to Claim 28 further comprising advancing the thus formed coaxial cable through an extruder and extruding a polymer composition around the metal sheath to form a protective jacket surrounding the coaxial cable.

30. The method according to Claim 28 wherein the foamable polymer composition further comprises an exothermic nucleating agent.

31. The method according to Claim 28 further comprising extruding a second polymer composition onto the foamable polymer composition, wherein after the step of causing the foamable polymer composition to foam and expand, the second polymer composition has a greater density than the expanded foamable polymer composition.

32. The method according to Claim 28 wherein the step of extruding the foamable polymer composition comprises coextruding the foamable polymer composition and a second polymer composition surrounding the foamable polymer composition, wherein after the step of causing the foamable polymer composition to foam and expand, the second polymer composition has a greater density than the expanded foamable polymer composition.

33. The method according to Claim 28 wherein the foamable polymer composition further comprises a thermoplastic binder.

1/1

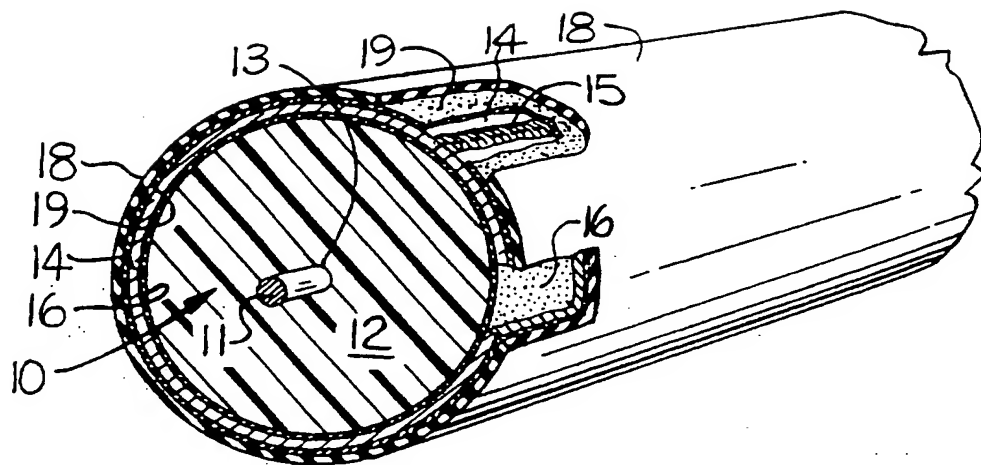


Fig 1

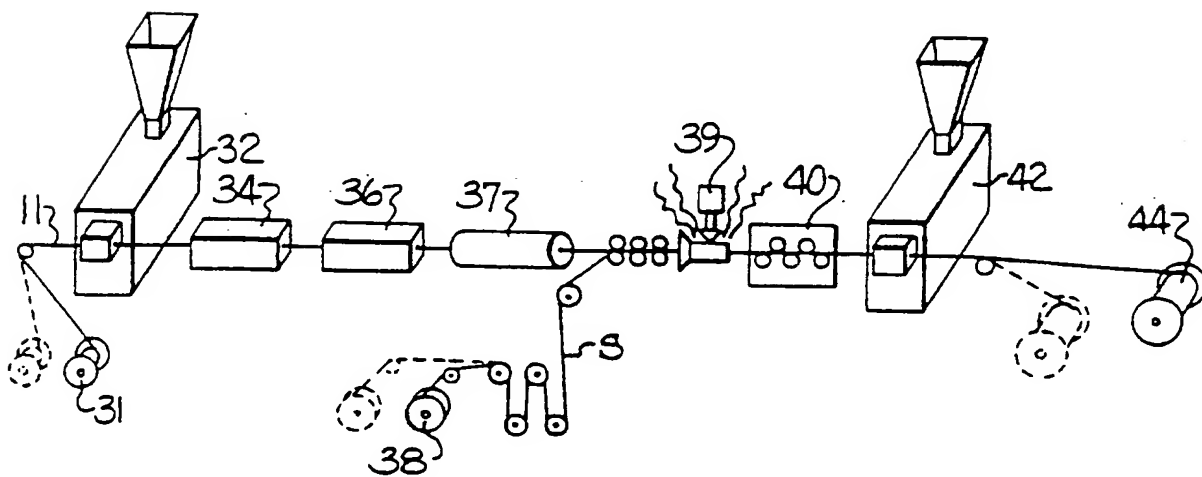


Fig 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/16810

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01B11/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 099 723 A (COMM / SCOPE) 1 February 1984 see page 6, line 26 - line 31 see page 12, line 34 - page 19, line 14; figures 2,3	1-4, 16, 21, 27-29
A	FR 2 152 396 A (CABLES DE LYON - ALSACIENNE - GEOFFROY DELORE) 27 April 1973 see page 1, line 39 - page 3, line 8; figure 1	1, 7, 24
A	US 5 393 929 A (HIDEO YAGIHASHI) 28 February 1995 see column 3, line 57 - column 5, line 20; figures 4,6	1, 2, 7-9, 24, 25

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 January 1998

Date of mailing of the international search report

26/01/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Demolder, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/16810

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 99723 A	01-02-84	US 4472595 A	18-09-84
		AU 556703 B	13-11-86
		AU 1695983 A	26-01-84
		CA 1208724 A	29-07-86
FR 2152396 A	27-04-73	NONE	
US 5393929 A	28-02-95	NONE	

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H01B 11/18	A1	(11) International Publication Number: WO 98/13834 (43) International Publication Date: 2 April 1998 (02.04.98)
<p>(21) International Application Number: PCT/US97/16810</p> <p>(22) International Filing Date: 22 September 1997 (22.09.97)</p> <p>(30) Priority Data: 60/026,700 25 September 1996 (25.09.96) US</p> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/026,700 (CON) Filed on 25 September 1996 (25.09.96)</p> <p>(71) Applicant (for all designated States except US): COMM-SCOPE, INC. [US/US]; 1375 Lenoir-Rhyne Boulevard, Hickory, NC 28603-0339 (US).</p> <p>(71) Applicant (for US only): AHERN, William, L. (legal representative of the deceased inventor) [US/US]; 199 Fort Avenue, Keyser, WV 26726 (US).</p> <p>(72) Inventor: AHERN, Michael (deceased).</p> <p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): FOX, Steve, Allen [US/US]; 340 44th Avenue Drive N.W., Hickory, NC 28602 (US).</p> <p>(74) Agents: LINKER, Raymond, O., Jr. et al.; Alston & Bird LLP, Bell Seltzer Intellectual Property Law Group, P.O. Drawer 34009, Charlotte, NC 28234 (US).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: COAXIAL CABLE AND METHOD OF MAKING SAME**(57) Abstract**

A flexible coaxial cable comprises a core including at least one inner conductor and a closed cell foam dielectric surrounding the inner conductor. The flexible coaxial cable also includes a tubular metallic sheath closely surrounding and preferably bonded to the core. The closed cell foam dielectric is a low density polyolefin foam and possesses improved electrical properties over conventional foam dielectrics. The coaxial cable has a velocity of propagation of greater than about 90 percent of the speed of light but still maintains high flexibility and bending characteristics.

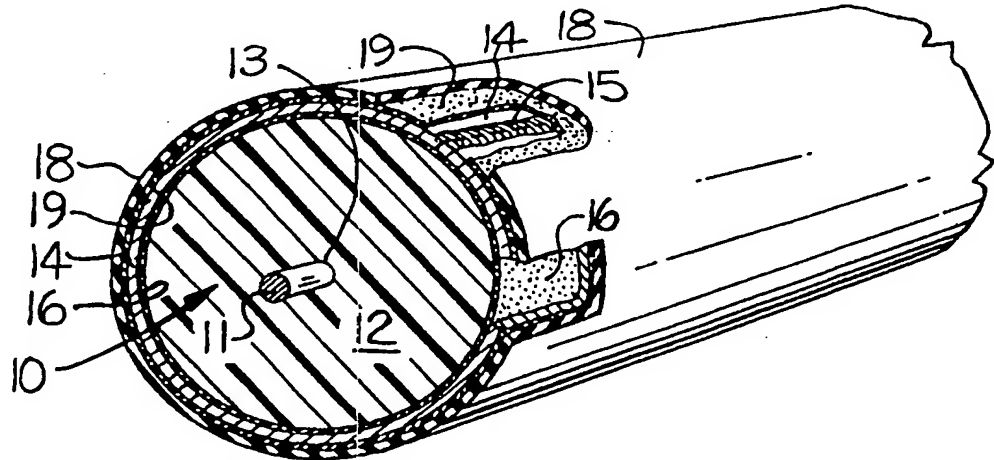

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.


AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
HJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
HR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CORRECTED
VERSION*CORRECTED
VERSION**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

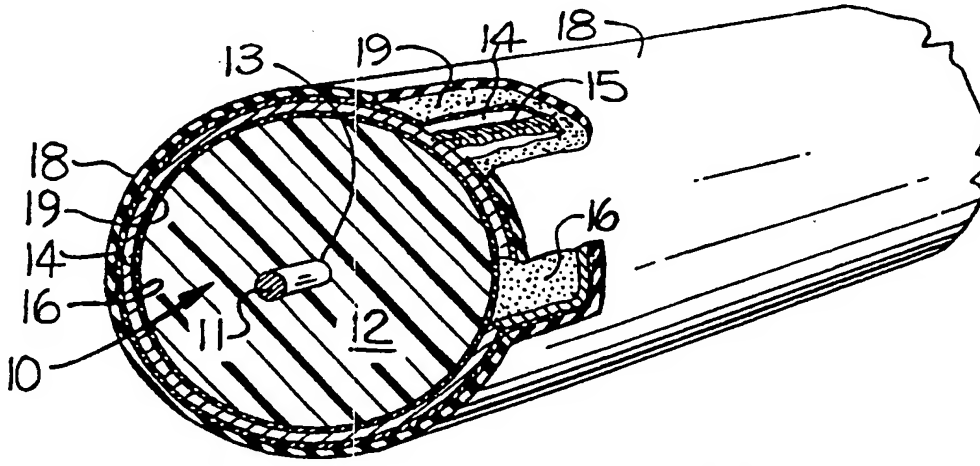(51) International Patent Classification ⁶: H01B 11/18	A1	(11) International Publication Number: WO 98/13834 (43) International Publication Date: 2 April 1998 (02.04.98)
(21) International Application Number: PCT/US97/16810 (22) International Filing Date: 22 September 1997 (22.09.97) (30) Priority Data: 60/026,700 25 September 1996 (25.09.96) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/026,700 (CON) Filed on 25 September 1996 (25.09.96) (71) Applicant (for all designated States except US): COMM-SCOPE, INC. OF NORTH CAROLINA [US/US]; 1375 Lenoir-Rhyne Boulevard, Hickory, NC 28603-0339 (US). (71) Applicant (for US only): AHERN, William, L. (legal representative of the deceased inventor) [US/US]; 199 Fort Avenue, Keyser, WV 26726 (US). (72) Inventor: AHERN, Michael (deceased). (72) Inventor; and (75) Inventor/Applicant (for US only): FOX, Steve, Allen [US/US]; 340 44th Avenue Drive N.W., Hickory, NC 28602 (US). (74) Agents: LINKER, Raymond, O., Jr. et al.; Alston & Bird LLP, Bell Seltzer Intellectual Property Law Group, P.O. Drawer 34009, Charlotte, NC 28234 (US).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: COAXIAL CABLE AND METHOD OF MAKING SAME		
(57) Abstract <p>A flexible coaxial cable comprises a core including at least one inner conductor and a closed cell foam dielectric surrounding the inner conductor. The flexible coaxial cable also includes a tubular metallic sheath closely surrounding and preferably bonded to the core. The closed cell foam dielectric is a low density polyolefin foam and possesses improved electrical properties over conventional foam dielectrics. The coaxial cable has a velocity of propagation of greater than about 90 percent of the speed of light but still maintains high flexibility and bending characteristics.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						